

# Calibration Gas Regulators

## VSR-15 Series

### Product Features


- Cylinder pressure regulator
- Brass chrome plated body or stainless steel body
- Piston type

### Typical Applications


- Calibration system

### Technical Data


Type:	single-stage
Inlet pressure:	max. 200 bar
Outlet pressure:	4 bar(standard) 2 bar(option)
Outlet flow settings:	see ordering info
Materials	
Body regulator:	see ordering info
Temperature range:	-20°C to +50°C
Leak rate:	Bubble-tight
Weight:	0.35 kg



### Dimensions (mm)

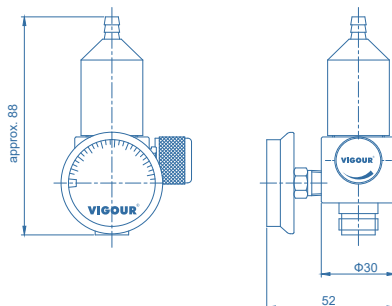

### Flow Chart

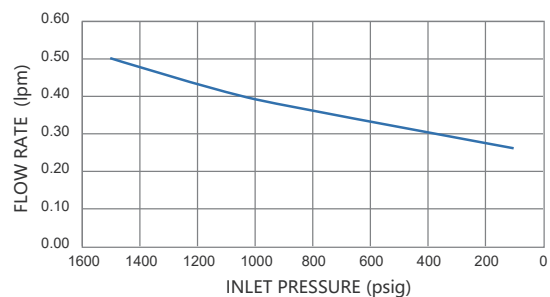

### Ordering Information

**VSR - 15C - 200 - 4 - 0.2 - C10 - 3/16 - W** — Flow Setting Type

<b>Body Material</b>	S: 316L C: Chrome Plated Brass
<b>Inlet Pressure P<sub>1</sub></b>	20: 20 bar 200: 200 bar
<b>Outlet Pressure P<sub>2</sub></b>	2: 2 bar (standard) 4: 4 bar (option)
<b>Flow Setting Type</b>	W: Hand wheel
<b>Outlet connection</b>	3/16: 3/16" Hose barb
<b>Inlet connection</b>	C10: 5/8-18 UNF (C-10) CGA600: CGA600
<b>Normal Flow</b>	0.2: 0.2 LPM    1.5: 1.5 LPM 0.3: 0.3 LPM    2.5: 2.5 LPM 0.5: 0.5 LPM    5: 5 LPM 1: 1 LPM        6: 6 LPM

